


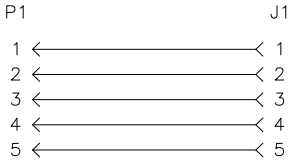


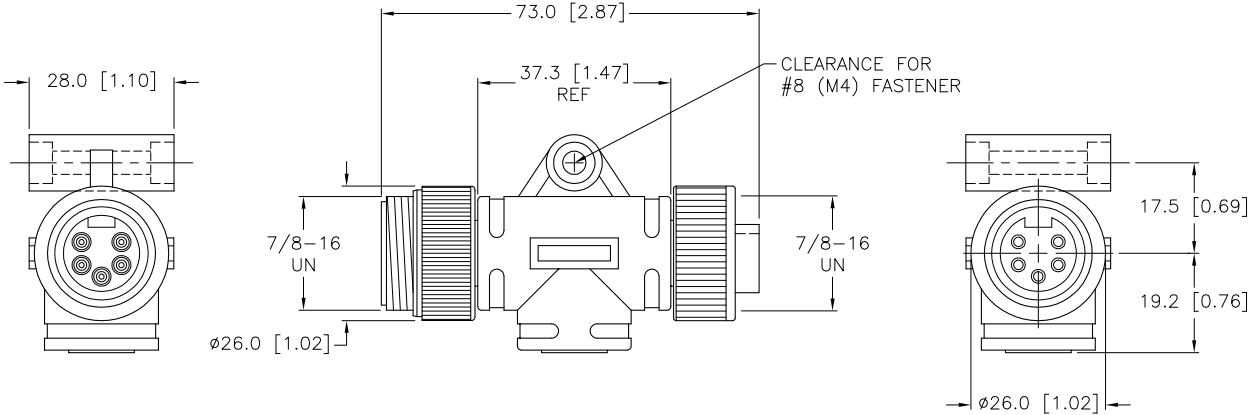


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 <p>1 = SHIELD 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L</p>	 <p>1 = SHIELD 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L</p>		CONTACT CARRIER MATERIAL/COLOR	TPU/BLE-GRAY
 			MOLDED HEAD MATERIAL/COLOR	TPU/BLE-GRAY
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	9.0
			RATED VOLTAGE [VDC]	600
			TEMPERATURE RATING	-40°C TO +55°C (-40°F TO 131°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

<div>RELATED DOCUMENTS</div> <div>1. 2. 3. 4.</div>					<div>3RD ANGLE PROJECTION</div> <div></div>		<div>THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>	
					<div>DRFT CBM</div> <div>DATE 06/27/00</div> <div>DSGN</div> <div>SCALE 1 = 1.5</div> <div>UNIT OF MEASUREMENT</div> <div>MILLIMETER [INCH]</div> <div>DO NOT SCALE THIS DRAWING</div>		<div>DESCRIPTION</div> <div>RSM RKM 57</div> <div>IDENTIFICATION NO.</div> <div>U5345-0</div> <div>REV</div> <div>C</div>	
					<div>MATERIAL</div>		<div>FINISH</div>	
C	DRAWING PROCESSED AS PART OF ECO 33971			CBM	04/07/11	33971		
REV	DESCRIPTION			BY	DATE	ECO NO.		