


# YEL,PVC,3X22,S-B,PVC,ITC Instrumentation Tray Cable – Reelfast™ Bulk Cable



## Features

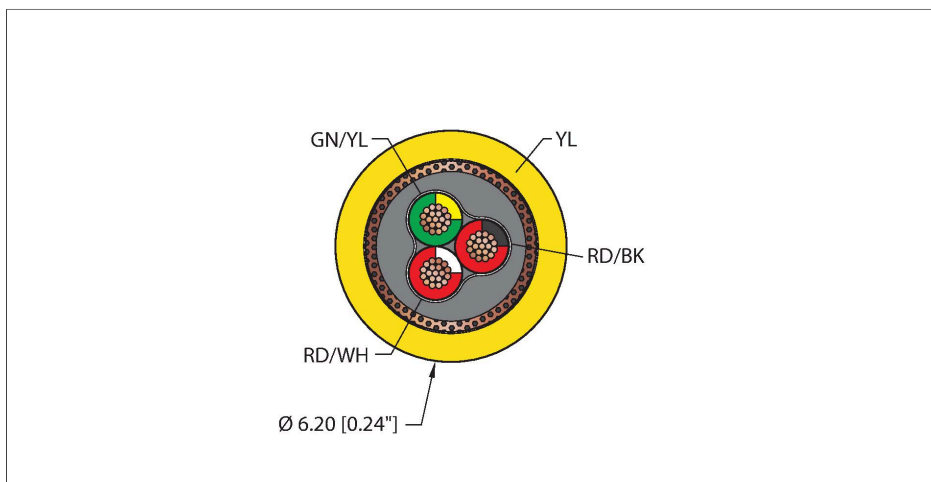

- ITC 150V
- PLTC 300V
- UL/CSA AWM 300V
- CMX OUTDOOR 300V
- CMG 300V
- Instrumentation Tray Cable
- Yellow PVC jacket, shielded, 3X22 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4

## Technical data

Type	YEL,PVC,3X22,S-B,PVC,ITC
ID no.	RF50535
<b>Cable data</b>	
Cable Platform	Instrumentation Tray Cable
Total number of conductors	3
Cable diameter	Ø 6.2 mm
Cable jacket	PVC, Yellow
Braid material	38 AWG, TC (Tinned Copper), 75% coverage
Inner jacket	PVC, Yellow
Conductor diameter	0.048 "
Conductor material	TC (tinned copper)
Conductor insulation material	SR-PVC
Conductor size	3 x 22 AWG [Similar to 0.34 mm <sup>2</sup> ]
Number of strands x O.D.	19 x 0.0058 "
Conductor colors	GN/YL, RD/BK, RD/WH
Weight	0.128 lbs. /meter
<b>Electrical properties at +20 °C</b>	
Voltage	ITC 150V PLTC 300V UL/CSA AWM 300V CMX OUTDOOR 300V CMG 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	17.5 Ω/1000ft max.

YEL,PVC,3X22,S-B,PVC,ITC| 11/11/2021 16-01 | technical changes reserved

## Technical data

Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø
Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C
Ambient temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
Approval	
UL Approvals	UL 2250 ITC UL 13 PLTC Sunlight Resistant -40C Cold Bend Oil Res I Oil Res II UL 758 AWM 2517
CSA Approvals	CSA AWM I/II A/B UL 444 CMX OUTDOOR-CMG CSA FT4
Compliances	RoHS CE
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.