


# GRY,PVC,3X26

## General Purpose Cable – Reelfast™ Bulk Cable



### Features

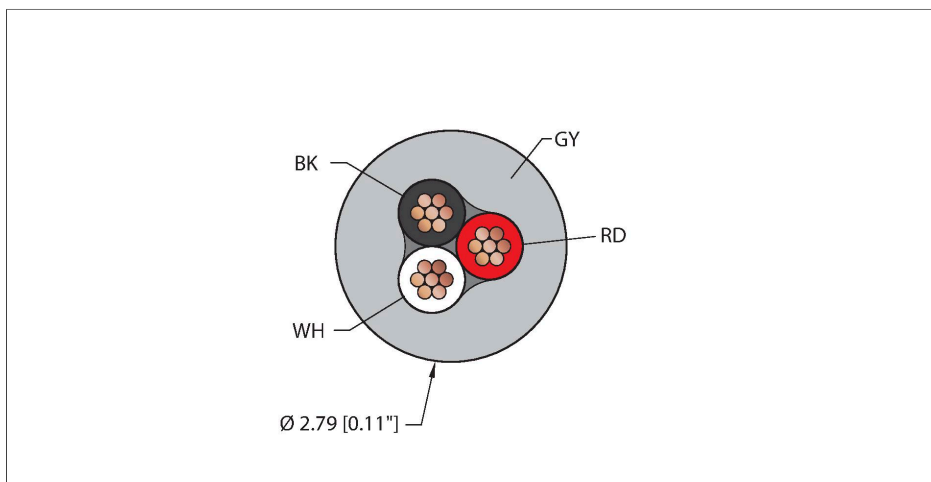

- 300V
- General Purpose Cable
- Gray PVC jacket, 3X26 AWG
- -40 Cold Bend Rating

### Technical data

Type	GRY,PVC,3X26
ID no.	RF50768
<b>Cable data</b>	
Cable Platform	General Purpose Cable
Total number of conductors	3
Cable diameter	Ø 2.79 mm
Cable jacket	PVC, Gray
Conductor diameter	0.032 "
Conductor material	TC (tinned copper)
Conductor insulation material	PE
Conductor size	3 x 26 AWG [Similar to 0.14 mm <sup>2</sup> ]
Number of strands x O.D.	7 x 34 AWG
Conductor colors	BK, RD, WH
Weight	0.025 lbs. /meter
<b>Electrical properties at +20 °C</b>	
Voltage	300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	40.8 Ω/1000ft max
<b>Mechanical and chemical properties</b>	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+80 °C

## Technical data

Ambient temperature range (dynamic)	-40 °C...+80 °C
-------------------------------------	-----------------

Temperature range (installation)	-20 °C...+80 °C
----------------------------------	-----------------

### Approval

Compliances	RoHS
-------------	------

### Note

- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.