


WHT,TPV,3X20 Washdown Cable – Reelfast™ Bulk Cable



Features

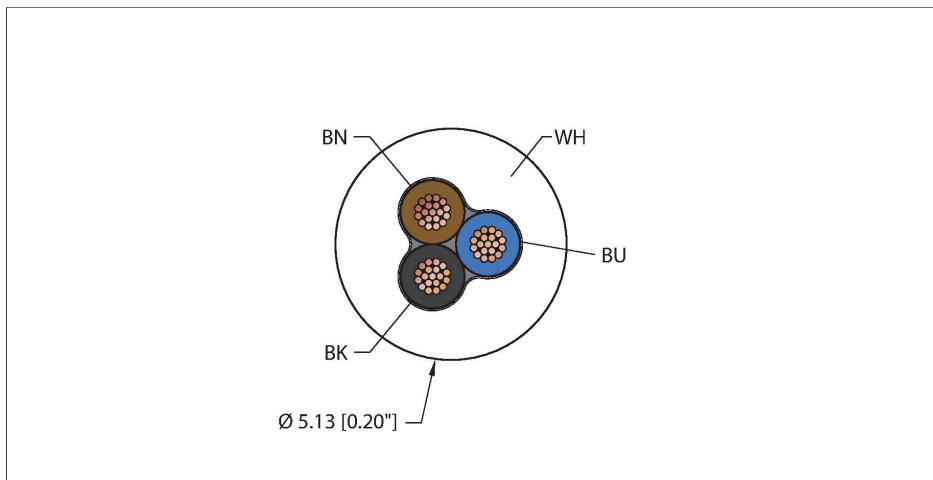

- 300V
- Washdown Cable
- White TPV jacket, 3X20 AWG
- -40 Cold Bend Rating

Technical data

Type	WHT,TPV,3X20
ID no.	RF51440
Cable data	
Cable Platform	Washdown Cable
Total number of conductors	3
Cable diameter	Ø 5.13 mm
Cable jacket	TPV, White
Conductor diameter	0.054 "
Conductor material	TC (tinned copper)
Conductor insulation material	TPC-ET
Conductor size	3 x 20 AWG [Similar to 0.50 mm ²]
Number of strands x O.D.	19 x 0.0073 "
Conductor colors	BN, BU, BK
Weight	0.079 lbs. /meter
Electrical properties at +20 °C	
Voltage	300V
Dielectric withstand (min.)	0.5 KVAC
DC resistance (max)	11.2 Ω/1000ft max
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C

WHT,TPV,3X20 | 11/11/2021 16-00 | technical changes reserved

Technical data

Ambient temperature range (dynamic)	-40 °C...+105 °C
-------------------------------------	------------------

Temperature range (installation)	-20 °C...+105 °C
----------------------------------	------------------

Approval

Compliances	RoHS
-------------	------

Note

- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.