


# WHT,TPV,8X24 Washdown Cable – Reelfast™ Bulk Cable



## Features

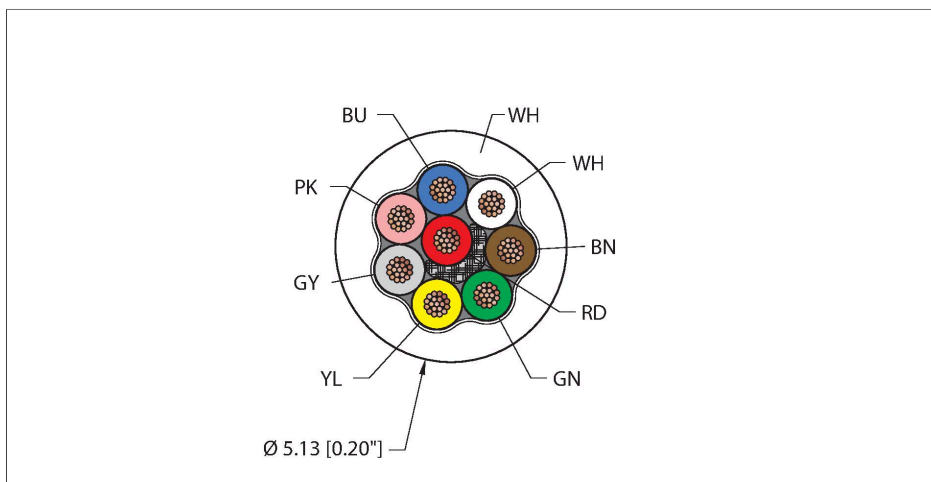

- 300V
- Washdown Cable
- White TPV jacket, 8X24 AWG
- -40 Cold Bend Rating

## Technical data

Type	WHT,TPV,8X24
ID no.	RF51465
<b>Cable data</b>	
Cable Platform	Washdown Cable
Total number of conductors	8
Cable diameter	Ø 5.13 mm
Cable jacket	TPV, White
Conductor diameter	0.035 "
Conductor material	TC (tinned copper)
Conductor insulation material	TPC-ET
Conductor size	8 x 24 AWG [Similar to 0.25 mm <sup>2</sup> ]
Number of strands x O.D.	19 x 36 AWG
Conductor colors	RD, BU, WH, BN, GN, YL, GY, PK
Weight	0.085 lbs. /meter
<b>Electrical properties at +20 °C</b>	
Voltage	300V
Dielectric withstand (min.)	0.5 KVAC
DC resistance (max)	25.67 Ω/1000ft max.
<b>Mechanical and chemical properties</b>	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C

WHT,TPV,8X24 | 11/11/2021 16-00 | technical changes reserved

## Technical data

Ambient temperature range (dynamic)	-40 °C...+105 °C
-------------------------------------	------------------

Temperature range (installation)	-20 °C...+105 °C
----------------------------------	------------------

### Approval

Compliances	RoHS
-------------	------

### Note

- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.