


## FEMALE END VIEW




1 = RED  
2 = GREEN/YELLOW  
3 = WHITE  
4 = BLACK



## SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/YELLOW
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBER OF CONDUCTORS [AWG]	4x18 AWG
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

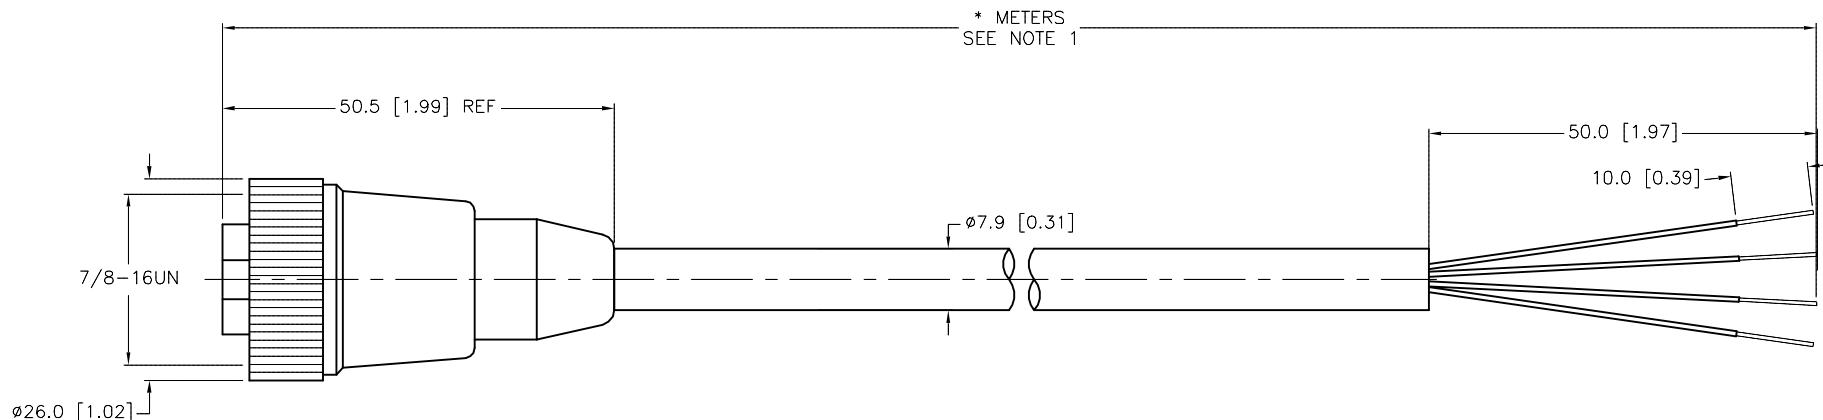

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
<b>STRIP LENGTH</b>	
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/CS11018" DESIGNATES GRAY PVC, ITC/PLTC/OPEN WIRING, 18 AWG WITH PIN OUT 1-RD, 2-GN, 3-WT, AND 4-BK.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	TURCK	SOURCE DRAWING - FOR REFERENCE ONLY		
					DRFT	RWC	DATE 02/28/05
MATERIAL	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	-	SCALE 1=1.0	DESCRIPTION	RKM 40-*M/CS11018
FINISH	SEE SEPCIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT	MILLIMETER [ INCH ]	IDENTIFICATION NO.	REV	G
			DO NOT SCALE THIS DRAWING		FILE: 777007075		SHEET 1 OF 1

G	UPDATE CONDUCTOR COLOR	NF	07/06/17	60478
REV	DESCRIPTION	BY	DATE	ECO NO.