

FLEXBUS TRANSFORMER COVER IP2X FOR 1 CONDUCTOR PER PHASE

CATALOG NUMBER

FLEXCOVIP2XONE



CERTIFICATIONS



FEATURES

Input/output for neutral/ground conductor

Resistance to solvent and hydrocarbon splashes

Installs quickly and easily

UV resistance

PRODUCT ATTRIBUTES

Article Number: 508160

Material: Polyvinylchloride

Working Temperature: -40 to 284 °F


Length: 18.31"

Width: 7.17"

Depth: 4.96"

Unit Weight: 1.17 lb

DIAGRAMS

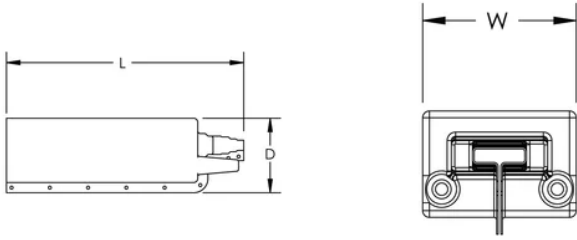

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



nVent.com

Our powerful portfolio of brands:
CADDY ERICO HOFFMAN RAYCHEM SCHROFF

TRACER