


## HCBC HIGH CURRENT BUSBAR CLAMP, 3.15"

### CATALOG NUMBER

**HCBC80**



### CERTIFICATIONS



### FEATURES

Connects copper busbar to copper busbar, nVent ERIFLEX Flexibar or power shunt

Made with non-magnetic materials for high current connections between nVent ERIFLEX Flexibar and rigid busbars such as transformer terminals

Rigid design assures even contact pressure

Installs quickly and easily

Ideal for on site modifications

RoHS compliant

### PRODUCT ATTRIBUTES

Article Number: 553100

Material: Stainless Steel 304 (EN 1.4301)

Clamping Capacity: 1.57"

Conductor Width: 3.15"

Depth: 0.79"

Height: 1.69"

Width: 5 1/2"


Thickness: 0.16"

Torque: 74'·lbf

ADDITIONAL PRODUCT DETAILS

Use two clamps for optimal contact pressure.

DIAGRAMS

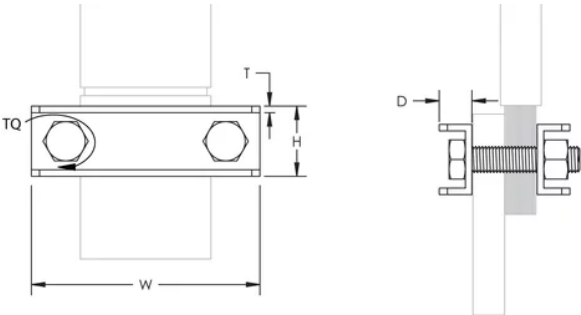

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

**North America**  
+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical Support

**Europe**  
Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

**Europe**  
Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

**APAC**  
Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500