

**5 - 8 Pin M16 versafast® Receptacles, Rear Mount**

- Male Receptacles
- IEC IP 67 Protection
- 125 VAC/DC, 8 A (5 pin)  
7 A (6-8 pin)



Housing Style	Part Number	Lead Specs.	Application	Pinout
	BKFD 5-5-*	5x20 AWG 105°C	5-Wire DC Application	<ol style="list-style-type: none"> <li>1. BN</li> <li>2. WH</li> <li>3. BU</li> <li>4. BK</li> <li>5. GY</li> </ol>
	BKFD 6-6-*	6x20 AWG 105°C	6-Wire DC Application	<ol style="list-style-type: none"> <li>1. BN</li> <li>2. WH</li> <li>3. BU</li> <li>4. BK</li> <li>5. GY</li> <li>6. PK</li> </ol>
	BKFD 7-7-*	7x20 AWG 105°C	7-Wire DC Application	<ol style="list-style-type: none"> <li>1. WH</li> <li>2. BN</li> <li>3. GN</li> <li>4. YE</li> <li>5. GY</li> <li>6. PK</li> <li>7. BU</li> </ol>
	BKFD 8-8-*	8x20 AWG 105°C	8-Wire DC Application	<ol style="list-style-type: none"> <li>1. WH</li> <li>2. BN</li> <li>3. GN</li> <li>4. YE</li> <li>5. GY</li> <li>6. PK</li> <li>7. BU</li> <li>8. RD</li> </ol>

See page G33 for dimensional drawings.


\* Length in meters. Standard lead lengths are 1 and 2 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass.

To specify PVC jacketed cable, add "/S717" to the end of the part number.

**M16 versafast® Receptacles**

**1**

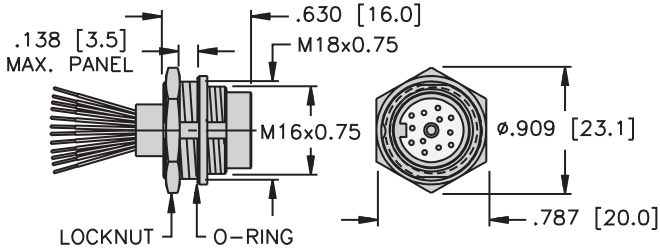


Typical panel cutout is 18 x 17 mm.

**BSF .. (5-8, 12-19 pin)**

**Page G37 - G38**

**2**

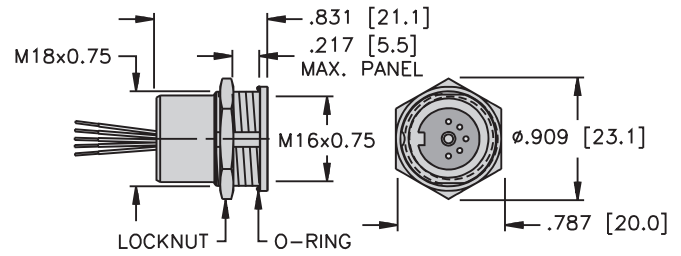


Typical panel cutout is 18 x 17 mm.

**BKF ..(5-8 pin)**

**Page G39**

**3**

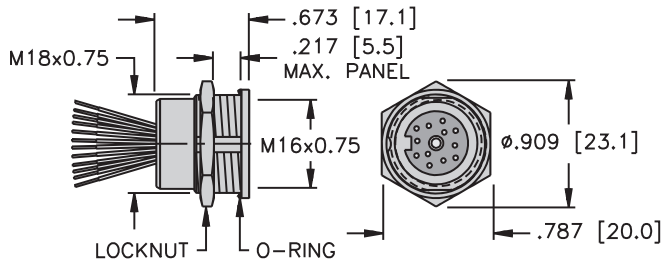


Typical panel cutout is 18 x 17 mm.

**BKF ..(12-19 pin)**

**Page G40**

**4**

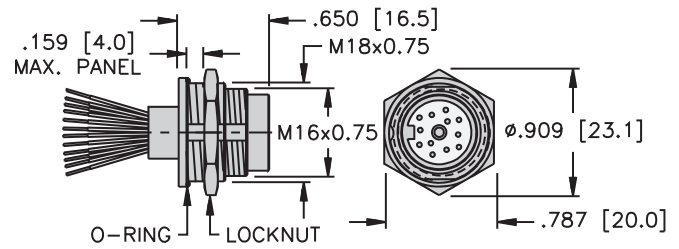


Typical panel cutout is 18 x 17 mm.

**BSFD .. (5-8, 12-19 pin)**

**Page G57 - G58**


**5**

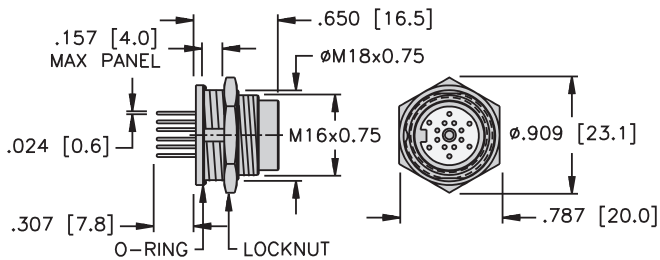

**BSFD ..PCB (5-8, 12-19 pin)**

**Page G65 - G66**


**6**

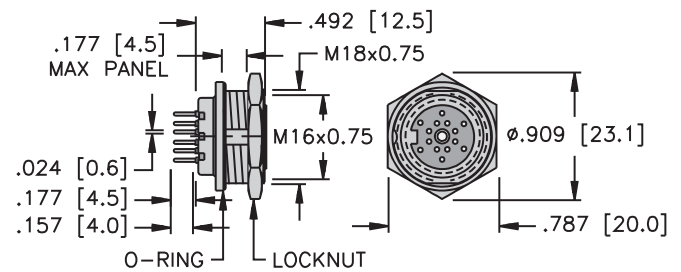

**BKFD ..PCB (5-8, 12-19 pin)**

**Page G67 - G68**

**7**

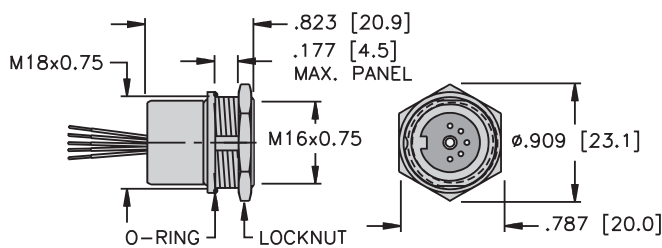


Typical panel cutout is 18 x 17 mm.

**BKFD .. (5-8 pin)**

**Page G59**

**8**

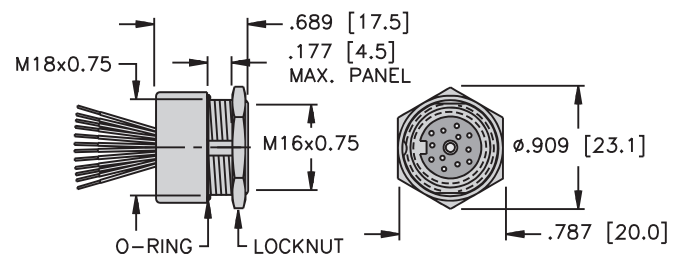

Typical panel cutout is 18 x 17 mm.

**BKFD ..(12-19 pin)**

**Page G60**