




eurofast® Cordsets and Extensions, Reverse Key


- PVC Cable
- Reverse Key (Type "B" coded keyway)
- Unshielded
- Primarily Used for AC



See table below



WAKW ..




WWAKW ..




WASW ..

5-Pin, Reverse Key, 250 V, 4.0 A

Application	Cable Specs	Pinout	Female		Male	
			Straight	Right Angle	Straight	Right Angle
Reverse key for 2-wire AC with ground UL Recognized CSA Certified	3/20 AWG Grey PVC 105°C 5.2 mm OD	1. Bn 2. Bu 3. N/C 4. Gn/Ye 5. N/C	WAKW 4T-*/S626	WWAKW 4T-*/S626	WASW 4T-*/S626	- - - -
Reverse key for 4-wire AC with ground UL Recognized CSA Certified	4/22 AWG, 1/20 AWG Grey PVC 105°C 5.7 mm OD	1. Bn 2. Wh 3. Bu 4. Bk 5. Gn/Ye	WAKW 4.5T-*	WWAKW 4.5T-*	WASW 4.5T-*	- - - -



WAKW .. WASW ..



WWAKW .. WASW ..

5-pin, Reverse Key Extensions, 250 V, 4.0 A

Application	Cable Specs	Straight Female Straight Male		Right Angle Female Straight Male	
Reverse key for 2-wire AC with ground UL Recognized CSA Certified	3/20 AWG Grey PVC 105°C 5.2 mm OD	WAKW 4T-*/WASW 4T/S626		WWAKW 4T-*/WASW 4T/S626	
Reverse key for 4-wire AC with ground UL Recognized CSA Certified	4/22 AWG, 1/20 AWG Grey PVC 105°C 5.7 mm OD	WAKW 4.5T-*/WASW 4.5T		WWAKW 4.5T-*/WASW 4.5T	

* = Length in meters


Specifications

Connector:	Oil resistant blue-grey polyurethane body material, Nylon contact carrier, spacings to VDE 0110 Group C.
Contacts:	Gold plated brass.
Coupling Nuts:	Nickel plated brass. See options below**.
Cable:	See table.
Protection:	NEMA 1,3,4,6P and IEC IP 68.
Cable Length:	Standard cable lengths are nominal 2, 4 and 6 meters. Other lengths available by request - consult factory.

**** Options:** To specify nylon coupling nut, add a "K" to part number.
For example: WAKW .. to WAKKW .. (straight female) or WASW .. to WASKW .. (straight male).
To specify stainless steel coupling nut, add a "V" to part number.
For example: WAKW .. to WAKVW .. (straight female) or WASW .. to WASVW .. (straight male).


Dimensions

WAKW ..

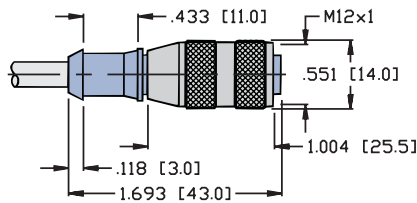


Female Connector

WASW ..

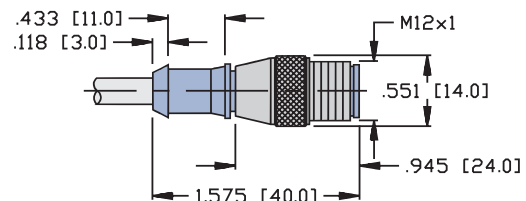

Male Connector

WWAKW ..

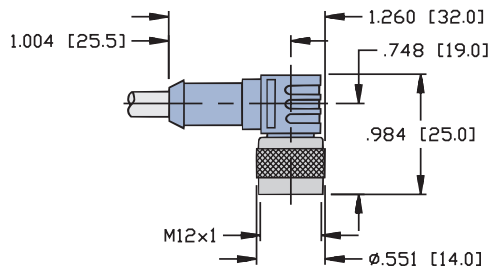

Female Connector

Pinouts

Female	Male
5-pin	5-pin