





Heyco® Universal Bushings

- Flexible shutters adjust to accommodate and support any shape from .125" (3,2 mm) to a maximum diameter of 1.500" (38,1 mm).
- Absorbs vibration and cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Fingertip pressure snap-locks the bushing into its mounting hole.
- See Quick Specs on 4-8.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS						
Maximum Thickness		Mounting Hole Diameter				Black	Maximum Inside Diameter		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	
.125	3,2	.500	12,7	2055	UB-500	.312	7,6	.600	15,2	.385	9,8	
.125	3,2	.625	15,9	2077	UB-625	.437	11,1	.718	18,3	.406	10,3	
.125	3,2	.750	19,1	2089	UB-750	.500	12,7	.844	21,4	.390	9,9	
.125	3,2	.812	20,6	2106	UB-812	.500	12,7	.890	22,6	.390	9,9	
.125	3,2	.875	22,2	2119	UB-875	.562	14,3	.937	23,8	.453	11,5	
.125	3,2	1.000	25,4	2137	UB-1000	.750	19,1	1.063	27,0	.453	11,5	
.125	3,2	1.093	27,8	2157	UB-1093	.812	20,6	1.156	29,4	.453	11,5	
NEW!	125	3,2	1.187	30,2	2153	UB-1187	.950	24,1	1.250	31,8	.453	11,5
NEW!	125	3,2	1.250	31,8	2155	UB-1250	1.015	25,8	1.314	33,4	.453	11,5
.125	3,2	1.375	34,9	2184	UB-1375	1.000	25,4	1.490	37,8	.453	11,5	
.125	3,2	1.500	38,1	2213	UB-1500	1.062	26,9	1.610	40,9	.450	11,4	
NEW!	125	3,2	1.750	44,5	2298	UB-1750	1.375	34,9	1.870	47,5	.465	11,8
NEW!	125	3,2	2.000	50,8	2422	UB-2000	1.640	41,6	2.130	54,0	.490	12,4
NEW!	250	6,35	2.500	63,5	2440	UB-2.500	1.970	50,0	2.660	67,6	.750	19,05
NEW!	250	6,35	3.000	76,2	2460	UB-3.000	2.470	62,7	3.160	80,3	.750	19,05

Standard color black. Consult Heyco for white and other colors.
Locking fingers in fractional increments up to maximum panel thickness.



NEW!

NEW!




Heyco® Shorty Universal Bushings

- Absorbs vibration and cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Fingertip pressure snap-locks the bushing into its mounting hole.
- Flexible shutters adjust to accommodate and support any shape from .125" (3,2 mm) to a maximum diameter of .820" (27,8 mm).
- See Quick Specs on 4-8.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS						
Maximum Thickness		Mounting Hole Diameter				Black	Maximum Inside Diameter		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.					in.	mm.	in.	mm.	
.062	1,6	.500	12,7	2858	SUB 500	.312	7,6	.600	15,2	.250	6,4	
.062	1,6	.625	15,9	2861	SUB 625	.437	11,1	.729	18,5	.250	6,4	
.062	1,6	.750	19,1	2862	SUB 750	.500	12,7	.859	21,8	.250	6,4	
.062	1,6	.875	22,2	2863	SUB 875	.560	14,2	.937	23,8	.250	6,4	
.062	1,6	1.000	25,4	2864	SUB 1000	.750	19,0	1.063	27,0	.250	6,4	
NEW!	.062	1,6	1.093	27,8	2158	SUB 1093	.820	27,8	1.156	29,4	.250	6,4

Standard color black. Consult Heyco for white and other colors.






Heyco® Thick Panel Universal Bushings

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness in.	Maximum Thickness mm.	Mounting Hole Diameter in.	Mounting Hole Diameter mm.			Black	Max. Inside Diameter	A Head Diameter	B Overall Height		
.250	6,4	.500	12,7	3001	UBT-500	.312	7,6	.600	15,2	.545	13,8
.250	6,4	.625	15,9	3118	UBT-625	.437	11,1	.718	18,3	.550	14,0
.250	6,4	.750	19,0	3119	UBT-750	.500	12,7	.844	21,4	.550	14,0
.250	6,4	.875	22,2	3120	UBT-875	.562	14,3	.937	23,8	.550	14,0
.250	6,4	1.000	25,4	3121	UBT-1000	.750	19,0	1.063	27,0	.550	14,0
.250	6,4	1.093	27,8	3002	UBT-1093	.812	20,6	1.156	29,4	.550	14,0
.250	6,4	1.375	34,9	3003	UBT-1375	1.000	25,4	1.490	37,8	.562	14,3
.250	6,4	1.500	38,1	3122	UBT-1500	1.062	26,9	1.610	40,9	.562	14,3

Standard color black. Consult Heyco for white and other colors.
Locking fingers in fractional increments up to the maximum panel thickness.

- For use in mounting panels up to .25" thick.
- Converts raw-edged holes to smooth, neat, insulated holes.
- Flexible shutters to absorb vibration on the inside diameter.
- Locking fingers snap into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in multiple sizes for use in .500" (12,7 mm) to 1.500" (38,1 mm) diameter holes.

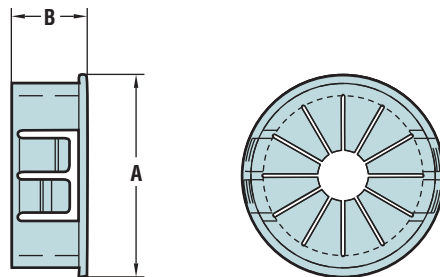

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs




Heyco® Open/Closed Universal Bushings

- Split design allows side entry and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- Parts can be assembled into holes that already contain cables or tubing.
- Only fingertip pressure required to snap-lock the bushing into its mounting hole.
- Flexible shutters adjust to accommodate and support any shape from .125" to a maximum diameter of 1.062".
- Absorbs vibration, cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Available in multiple sizes for use in .500" (12,7 mm) to 1.500" (38,1 mm) diameter holes.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness in.	3,2	Mounting Hole Diameter in.	mm.			Black	Max. Inside Diameter	A Head Diameter		B Overall Height	
.125	3,2	.500	12,7	2055SP	OCUB-500	.312	7,6	.562	14,3	.385	9,8
.125	3,2	.625	15,9	2077SP	OCUB-625	.437	11,1	.718	18,2	.406	10,3
.125	3,2	.750	19,0	2089SP	OCUB-750	.500	12,7	.812	20,6	.406	10,3
.125	3,2	.875	22,2	2119SP	OCUB-875	.562	14,3	.921	23,4	.406	10,3
.125	3,2	1.000	25,4	2137SP	OCUB-1000	.750	19,0	1.062	27,0	.406	10,3
.125	3,2	1.093	27,8	2157SP	OCUB-1093	.812	20,6	1.187	30,2	.406	10,3
.125	3,2	1.250	31,8	2196SP	OCUB-1250	.937	23,8	1.468	37,3	.406	10,3
.125	3,2	1.375	34,9	2184SP	OCUB-1375	1.000	25,4	1.468	37,3	.406	10,3
.125	3,2	1.500	38,1	2213SP	OCUB-1500	1.062	26,9	1.578	40,1	.421	10,7

Standard color black. Consult Heyco for white and other colors.
Locking fingers in fractional increments up to the maximum panel thickness.

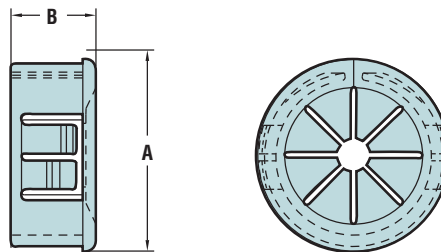

Quick Specs

Material 6/6 Nylon
 Certifications Recognized under the Component Program of Underwriters' Laboratories, File E15331
 Certified by the Canadian Standards Association, File LR8919
 Flammability Rating 94V-2
 Material Temperature Index 257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)