

Product data sheet

Characteristics


8736SDO2V02H30S

NEMA Starter, Type S, reversing, horizontal, Size 2, 45A, 25 HP at 575 VAC, up to 100 kA SCCR, 3 phase, 3 pole, Motor Logic SSOLR, 120 VAC coil, open



Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 2451.00 USD

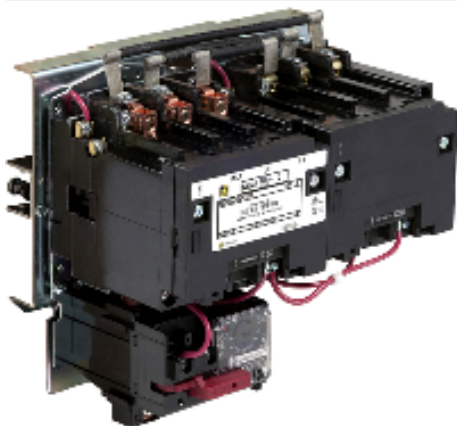

Main

| | |
|---------------------------|-----------|
| Product or component type | Starter |
| Range of product | S |
| Motor starter type | Reversing |

Complementary

| | |
|--------------------------------|---|
| NEMA size | 2 |
| Line Rated Current | 45 A |
| Poles description | 3P |
| Installation direction | Horizontal |
| Wiring mode | 3 wires |
| [Ue] rated operational voltage | 600 V AC |
| Phase | 3 phase |
| Thermal overload type | Solid state Motor Logic class 10/20 |
| Rated power in HP | 10 HP 200 V AC 15 HP 230 V AC 25 HP 460 V AC 25 HP 575 V AC |
| Product compatibility | Circuit-breaker 100 A maximum: 100 kA at 480 V AC Fuse J 100 A maximum: 100 kA at 600 V AC Fuse T 100 A maximum: 100 kA at 600 V AC Fuse RK1 100 A maximum: 100 kA at 600 V AC Fuse RK5 100 A maximum: 100 kA at 600 V AC |
| [Uc] control circuit voltage | 110 V AC 50 Hz 120 V AC 60 Hz |
| Control circuit | Separate control circuit |
| Control units | No control units |
| Local signalling | Without pilot light |
| Auxiliary contact composition | Without |

| | |
|-----------------------|-----------------------|
| Electrical connection | Screw clamp terminals |
| Height | 8.50 In (215.90 mm) |
| Width | 9.00 In (228.60 mm) |
| Depth | 6.03 In (153.16 mm) |

Environment

| | |
|---------------------------|-------------------------|
| NEMA degree of protection | Not rated (open device) |
| Product certifications | UL Listed CSA |


Ordering and shipping details

| | |
|-----------------------|------------------------------------|
| Category | 21272 - 8702,36 SC,SD(NOT S*R,T,W) |
| Discount Schedule | CP1 |
| GTIN | 00785901970293 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 35.00 Lb(US) (15.876 kg) |
| Returnability | No |
| Country of origin | MX |

Packing Units

| | |
|------------------|----------------------|
| Package 1 Height | 8.50 In (21.590 cm) |
| Package 1 width | 11.30 In (28.702 cm) |
| Package 1 Length | 13.70 In (34.798 cm) |

Offer Sustainability

| | |
|---------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| EU RoHS Directive | Not compliant |
| China RoHS Regulation |  China RoHS Declaration |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Product Life Status : **Commercialised**