

Product data sheet

Characteristics

LC1D12B7

IEC contactor, TeSys D, nonreversing, 12A, 7.5HP at 480VAC, up to 100kA SCCR, 3 phase, 3 NO, 24VAC 50/60Hz coil, open



Product availability: Stock - Normally stocked in distribution facility

Price*: 119.00 USD



Main

| | |
|--|---|
| Range | TeSys |
| Product name | TeSys D |
| Product or component type | Contacteur |
| Device short name | LC1D |
| Contacteur application | Resistive load Motor control |
| Utilisation category | AC-3 AC-1 AC-4 |
| Poles description | 3P |
| Pole contact composition | 3 NO |
| [Ue] rated operational voltage | Power circuit <= 690 V AC 25...400 Hz Power circuit <= 300 V DC |
| [Ie] rated operational current | 25 A 140 °F (60 °C) <= 440 V AC AC-1 power circuit 12 A 140 °F (60 °C) <= 440 V AC AC-3 power circuit |
| Motor power kW | 3 KW 220...230 V AC 50/60 Hz AC-3) 5.5 KW 380...400 V AC 50/60 Hz AC-3) 5.5 KW 415...440 V AC 50/60 Hz AC-3) 7.5 KW 500 V AC 50/60 Hz AC-3) 7.5 KW 660...690 V AC 50/60 Hz AC-3) 3.7 KW 400 V AC 50/60 Hz AC-4) |
| Maximum Horse Power Rating | 0.5 Hp 115 V at AC 50/60 Hz for 1 phase 2 Hp 230/240 V at AC 50/60 Hz for 1 phase 3 Hp 200/208 V at AC 50/60 Hz for 3 phase 3 Hp 230/240 V at AC 50/60 Hz for 3 phase 7.5 Hp 460/480 V at AC 50/60 Hz for 3 phase 10 Hp 575/600 V at AC 50/60 Hz for 3 phase |
| Control circuit type | AC 50/60 Hz |
| [Uc] control circuit voltage | 24 V AC 50/60 Hz |
| Auxiliary contact composition | 1 NO + 1 NC |
| [Uimp] rated impulse withstand voltage | 6 KV IEC 60947 |
| Overvoltage category | III |

| | |
|--|--|
| [I _{th}] conventional free air thermal current | 25 A 140 °F (60 °C) power circuit 10 A 140 °F (60 °C) signalling circuit |
| I _{rms} rated making capacity | 250 A 440 V power circuit IEC 60947 140 A AC signalling circuit IEC 60947-5-1 250 A DC signalling circuit IEC 60947-5-1 |
| Rated breaking capacity | 250 A 440 V power circuit IEC 60947 |
| [I _{cw}] rated short-time withstand current | 105 A 104 °F (40 °C) - 10 s power circuit 210 A 104 °F (40 °C) - 1 s power circuit 30 A 104 °F (40 °C) - 10 min power circuit 61 A 104 °F (40 °C) - 1 min power circuit 100 A - 1 s signalling circuit 120 A - 500 ms signalling circuit 140 A - 100 ms signalling circuit |
| Associated fuse rating | 10 A gG signalling circuit IEC 60947-5-1 40 A gG ≤ 690 V type 1 power circuit 25 A gG ≤ 690 V type 2 power circuit |
| Average impedance | 2.5 MOhm - I _{th} 25 A 50 Hz power circuit |
| [U _i] rated insulation voltage | Power circuit 690 V IEC 60947-4-1 Power circuit 600 V CSA Power circuit 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL |
| Electrical durability | 2 Mcycles 12 A AC-3 ≤ 440 V 0.8 Mcycles 25 A AC-1 ≤ 440 V |
| Power dissipation per pole | 0.36 W AC-3 1.56 W AC-1 |
| Protective cover | With |
| Mounting support | Rail Plate |
| Standards | CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 |
| Product certifications | CCC CSA GL GOST BV DNV RINA LROS (Lloyds register of shipping) UL |
| Connections - terminals | Power circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Power circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Power circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible with cable end Power circuit screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)flexible with cable end Power circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)solid without cable end Power circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)solid without cable end Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible with cable end Control circuit screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)flexible with cable end Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)solid without cable end Control circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)solid without cable end |

| | |
|--------------------------|--|
| Tightening torque | Power circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals flat Ø 6 mm Power circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals Philips No 2 Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals flat Ø 6 mm Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals Philips No 2 |
| Operating time | 12...22 ms closing 4...19 ms opening |
| Safety reliability level | B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1 |
| Mechanical durability | 15 Mcycles |
| Maximum operating rate | 3600 Cyc/H 140 °F (60 °C) |

Complementary

| | |
|---------------------------------|---|
| Coil technology | Without built-in suppressor module |
| Control circuit voltage limits | 0.3...0.6 Uc -40...158 °F (-40...70 °C) drop-out AC 50/60 Hz 0.8...1.1 Uc -40...140 °F (-40...60 °C) operational AC 50 Hz 0.85...1.1 Uc -40...140 °F (-40...60 °C) operational AC 60 Hz 1...1.1 Uc 140...158 °F (60...70 °C) operational AC 50/60 Hz |
| Inrush power in VA | 70 VA 60 Hz 0.75 68 °F (20 °C)) 70 VA 50 Hz 0.75 68 °F (20 °C)) |
| Hold-in power consumption in VA | 7.5 VA 60 Hz 0.3 68 °F (20 °C)) 7 VA 50 Hz 0.3 68 °F (20 °C)) |
| Heat dissipation | 2...3 W 50/60 Hz |
| Auxiliary contacts type | Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1 |
| Signalling circuit frequency | 25...400 Hz |
| Minimum switching current | 5 MA signalling circuit |
| Minimum switching voltage | 17 V signalling circuit |
| Non-overlap time | 1.5 Ms on de-energisation between NC and NO contact 1.5 Ms on energisation between NC and NO contact |
| Insulation resistance | > 10 MOhm signalling circuit |

Environment

| | |
|---------------------------------------|--|
| IP degree of protection | IP20 front face IEC 60529 |
| Protective treatment | TH IEC 60068-2-30 |
| Pollution degree | 3 |
| Ambient air temperature for operation | -40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating |
| Ambient air temperature for storage | -76...176 °F (-60...80 °C) |
| Operating altitude | 0...9842.52 ft (0...3000 m) |
| Fire resistance | 1562 °F (850 °C) IEC 60695-2-1 |
| Flame retardance | V1 conforming to UL 94 |
| Mechanical robustness | Vibrations contactor open2 Gn, 5...300 Hz Vibrations contactor closed4 Gn, 5...300 Hz Shocks contactor open10 Gn for 11 ms Shocks contactor closed15 Gn for 11 ms |
| Height | 3.03 In (77 mm) |
| Width | 1.77 In (45 mm) |
| Depth | 3.39 In (86 mm) |
| Net weight | 0.72 Lb(US) (0.325 kg) |

Ordering and shipping details

| | |
|-----------------------|--------------------------------------|
| Category | 22354 - CTR, TESYS D, OPEN, 9-38A AC |
| Discount Schedule | I12 |
| GTIN | 03389110349160 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 12.66 Oz (359 g) |

| | |
|-------------------|-----|
| Returnability | Yes |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|---------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.97 In (5 cm) |
| Package 1 width | 3.54 In (9 cm) |
| Package 1 Length | 4.33 In (11 cm) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 20 |
| Package 2 Weight | 16.88 Lb(US) (7.655 kg) |
| Package 2 Height | 5.91 In (15 cm) |
| Package 2 width | 11.81 In (30 cm) |
| Package 2 Length | 15.75 In (40 cm) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 320 |
| Package 3 Weight | 288.06 Lb(US) (130.66 kg) |
| Package 3 Height | 31.50 In (80 cm) |
| Package 3 width | 31.50 In (80 cm) |
| Package 3 Length | 23.62 In (60 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| PVC free | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

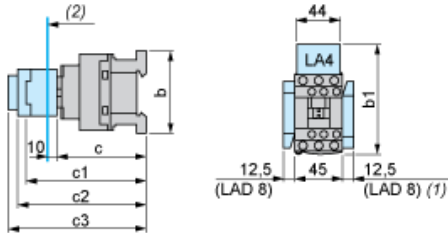

- (1) Including LAD 4BB
- (2) Minimum electrical clearance

| LC1 | | D09...D18 | D093...D123 | D099...D129 |
|--|------------------------------------|--------------------|----------------------|-------------|
| b | without add-on blocks | 77 | 99 | 80 |
| b1 | with LAD 4BB | 94 | 107 | 95.5 |
| with LA4 D _{F10} ⁽¹⁾ | | 123 ⁽¹⁾ | 111.5 ⁽¹⁾ | |
| with LA4 D _{F14} ⁽¹⁾ | | 132 ⁽¹⁾ | 120.5 ⁽¹⁾ | |
| with LA4 D _{F16} ⁽¹⁾ | | 139 ⁽¹⁾ | 127.5 ⁽¹⁾ | |
| c | without cover or add-on blocks | 84 | 84 | 84 |
| | with cover, without add-on blocks | 86 | 86 | |
| c1 | with LAD N or C (2 or 4 contacts) | 117 | 117 | 117 |
| c2 | with LA6 DK10, LAD 6K10 | 129 | 129 | 129 |
| c3 | with LAD T, R, S | 137 | 137 | 137 |
| | with LAD T, R, S and sealing cover | 141 | 141 | |
| (1) | Including LAD 4BB. | | | |

Wiring



Product Life Status : Commercialised