

# Product data sheet

## Characteristics

# RMCA61BD

Harmony analog, Isolated analog converter, 0...15 A current to 0...10 V or 4...20 mA



Product availability: Stock - Normally stocked in distribution facility

Price\*: 154.00 USD



### Main

Range of product	Harmony Analog
Product or component type	Voltage/Current converter
Analogue input type	Current 0...1.5 A AC/DC 50/60 Hz Current 0...15 A AC/DC 50/60 Hz Current 0...5 A AC/DC 50/60 Hz
Analogue output type	Current 0...20 mA <= 500 Ohm by cabling Current 4...20 mA <= 500 Ohm by cabling Voltage 0...10 V >= 100 kOhm by cabling

### Complementary

Protection type	Reverse polarity protection on output Short-circuit protection on output Overvoltage protection on output (+/- 30 V)
Analogue output voltage	-15...0 V no input or input wire broken
Analogue output current	-30...0 MA 0...20 mA no input or input wire broken 4...30 MA 4...20 mA no input or input wire broken
[Us] rated supply voltage	24 V DC +/- 20 %, isolated
Current consumption	<= 70 mA voltage output <= 90 mA current output
Local signalling	For power ON LED (green)
Measurement error	+/- 10 % of full scale 20 °C electromagnetic interference of 10 V/m +/- 5 % of full scale 20 °C
Repeat accuracy	+/- 0.2 % full scale 20 °C +/- 0.6 % full scale 60 °C
Temperature coefficient	1000 ppm/°C 0...5 A 2000 ppm/°C 0...15 A 500 ppm/°C 0...1.5 A
Clamping connection capacity	2 x 1.5 mm <sup>2</sup> 1 x 2.5 mm <sup>2</sup>
Tightening torque	5.31...9.74 Lbf.In (0.6...1.1 N.m)
Marking	CE
Surge withstand	0.5 KV 1.2/50 µs IEC 61000-4-5
[Ui] rated insulation voltage	2 KV

Fixing mode	By screws mounting plate) Clip-on 35 mm symmetrical DIN rail)
Safety reliability data	B10d = 22108 MTTFd = 23.9 years
Net weight	0.33 Lb(US) (0.15 kg)

## Environment

Standards	IEC 60947-1 IEC 60584-1
Product certifications	CSA UL GL
IP degree of protection	IP20 terminal block) IP50 housing)
Fire resistance	1562 °F (850 °C) IEC 60695-2-1 1562 °F (850 °C) UL
Shock resistance	50 gn 11 ms IEC 60068-2-27
Vibration resistance	5 gn 10...100 Hz)IEC 60068-2-6
Resistance to electrostatic discharge	6 KV in contact)IEC 61000-4-2 level 3 8 KV in air)IEC 61000-4-2 level 3
Resistance to fast transients	1 KV IEC 61000-4-4 on input-output) 2 KV IEC 61000-4-4 on power supply)
Disturbance radiated/conducted	CISPR 11 CISPR 22 group 1 - class B
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Ambient air temperature for operation	32...122 °F (0...50 °C) mounting side by side 32...140 °F (0...60 °C) 2 cm spacing
Pollution degree	2 IEC 60664-1

## Ordering and shipping details

Category	22375 - INTERFACE MODULE(ABA,R,S)
Discount Schedule	CP2
GTIN	03389110108880
Nbr. of units in pkg.	1
Package weight(Lbs)	5.64 Oz (160 g)
Returnability	Yes
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.91 In (4.852 cm)
Package 1 width	3.22 In (8.168 cm)
Package 1 Length	3.31 In (8.397 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 Yes

---

China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information

---

### Contractual warranty

---

Warranty	18 months
----------	-----------


---

---

Analog Interface: Voltage/Current Converter

---

Dimensions

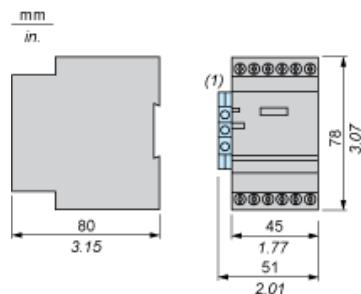


(1) Terminal block AB1TP435U or AB1RRNTP435U2

---


## Mounting

---

### Mounting on Rails AM1.....

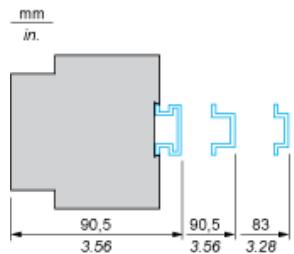

### Panel Mounting

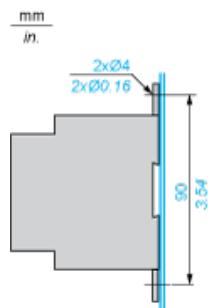


---

Analog Interface: Voltage/Current Converter

---

Wiring Diagram

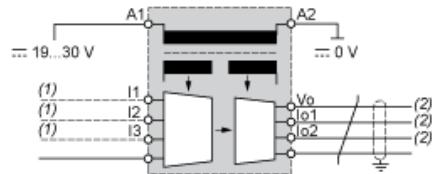

(1) Use 1 input only.  
(2) Use 1 output only.

The input, output and power supply lines must be kept away from the power cables to avoid effects due to induced interference.

The input and output cables must be shielded as indicated in the schemes and must be kept away from each other.

Product Life Status : **Commercialised**