

Product data sheet

Characteristics

SSM3A325F7

Harmony, Solid state modular relay, 25 A, DIN rail mount, zero voltage switching, input 90...140 V AC, output 48...600 V AC



Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 130.62 USD



Main

Range of Product	Harmony Solid State Relays
Product or Component Type	Solid state relay up to 30 A
Device short name	SSM3
Number of Channels	3
Phase	3 phase
Output switching mode	Zero voltage switching

Complementary

Mounting Support	Symmetrical DIN rail
Line Rated Current	25 A
Output voltage	48...600 V AC
[Uc] control circuit voltage	90...140 V AC
Tightening torque	0.6...0.7 N.m for input 1.36...1.7 N.m for output
Connections - terminals	Screw terminals 0.2...1.3 mm ² , AWG 24...AWG 16) input Screw terminals 1.3...5.3 mm ² , AWG 16...AWG 10) output
Capacitance unbalance	8 PF for input/output
Insulation resistance	1000 MOhm
Local signalling	For input status LED (green)
Switching voltage	90 V turn-on 10 V turn-off
Input current limits	15...19 MA
Solid state output type	Zero voltage switching
Load current	0.1...25 A
Absolute maximum voltage	1100 V
Surge current	286 A 20 ms 50 Hz 300 A 16.6 ms 60 Hz
Maximum voltage drop	<1.35 V on-state

Maximum Horse Power Rating	1 Hp 104 °F (40 °C) 240 V AC 2 Hp 104 °F (40 °C) 380 V AC 3 Hp 104 °F (40 °C) 480 V AC
Maximum I ² t for fusing	410 A ² .S for 10 ms at 50 Hz 374 A ² .S for 8.3 ms at 60 Hz
Maximum leakage current	0.25 MA off-state
DV/dt	500 V/μs off-state at maximum voltage
Response time	30 ms (turn-off) 20 ms (turn-on)
Cos phi	0.5 (with maximum load)
Overvoltage category	III
Net Weight	1.63 Lb(US) (0.74 kg)

Environment

Dielectric strength	4 KV AC for input/output 4 KV AC for input or output to case
Pollution degree	2
Standards	IEC 60950-1 UL 508 CSA C22.2 No 14
Product Certifications	UL EAC CSA
Marking	CSA UL CE EAC
IP degree of protection	IP20
Ambient Air Temperature for Operation	-4...176 °F (-20...80 °C)
Ambient Air Temperature for Storage	-40...212 °F (-40...100 °C)

Ordering and shipping details

Category	22375 - INTERFACE MODULE(ABA,R,S)
Discount Schedule	CP2
GTIN	03606485441696
Nbr. of units in pkg.	1
Package weight(Lbs)	28.64 Oz (812 g)
Returnability	Yes
Country of origin	MX

Packing Units


Unit Type of Package 1	PCE
Package 1 Height	5.51 In (14 cm)
Package 1 width	4.33 In (11 cm)
Package 1 Length	4.33 In (11 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes


China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Dimensions

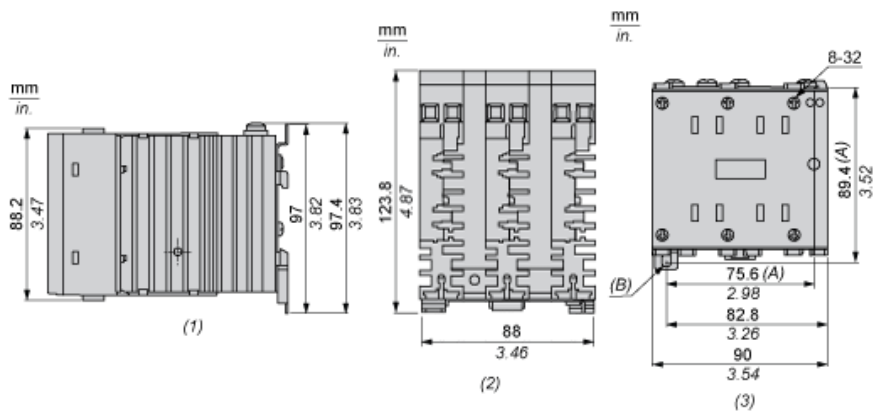

- (1) Side view
- (2) Top view
- (3) Front view
- (A) Mounting hole
- (B) Mounting hole / slot

Derating Curves

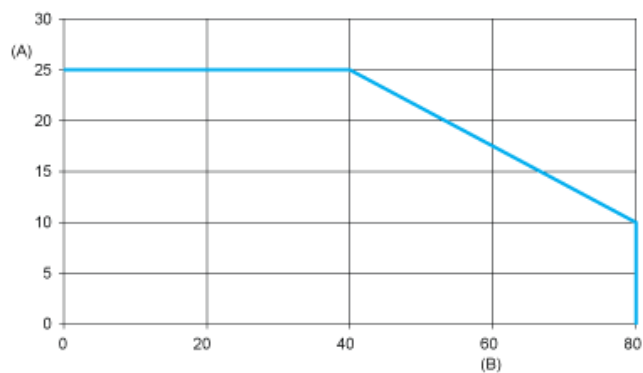

A : Output Current (Arms)
B : Ambient Temperature (°C)

Product Life Status : **Commercialised**