

Product data sheet

Specifications



Power relay, SE Relays, DPDT, 25A, 120 VAC, side flange cover

389FXBXC1-120A

Product availability: Stock - Normally stocked in distribution facility

Price*: 41.43 USD

Main

Product Type	Power relay
Switch Function	DPDT
Contact Composition	2 NC + 2 NO

Complementary

Input Current	25 A
Short Circuit Current	3 kA
Associated Fuse Rating	32 A gG at 400 V coordination type 2 for power circuit
Average Pole Impedance	4 mOhm
Contacts Material	Silver alloy contacts
Wire Strip Length	0.3 in (8 mm)
Minimum Switching Current	100 mA 5 V DC
Coil Resistance	1700 Ohm
Input voltage	120 V AC
Drop-out Voltage Threshold	$\geq 0.1 U_c$ AC/DC
Rated Operational Current	25 A at 300 V AC (on resistive load) conforming to UL 5 A at 600 V AC (on resistive load) conforming to UL 13 A at 28 V DC (on resistive load) conforming to UL 22 A at 120 V AC (full load) conforming to UL 20 A at 277 V AC (ballast) conforming to UL 25 A at 250 V AC-1 (NO/NC) conforming to IEC 15 A at 28 V DC-1 (NO/NC) conforming to IEC
Power consumption in W	1.3 W DC
Power consumption in VA	2 VA AC
Voltage Range	0.85...1.1 U_c AC
Maximum Switching Voltage	600 V AC
Motor Power HP	1.5 hp 200/240 V AC 50/60 Hz 1 hp 120...200V AC 50/60 Hz 1 hp 600 V AC 50/60 Hz
Connections Terminals	Quick
Mounting	Flange
Product Weight	3.0 oz (84 g)

Environment

Ambient Air Temperature for Operation	-22...131 °F (-30...55 °C)
---------------------------------------	----------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature for Storage	-22...185 °F (-30...85 °C)
Product Certifications	cURus CSA CE
Electrical Durability	100000 cycles resistive load 50000 cycles resistive DC load
Mechanical Durability	5000000 cycles
IP Degree of Protection	IP40
Dielectric Strength	2200 V AC between coil and contact 2200 V AC between poles 1600 V AC between contacts

Ordering and shipping details

Category	US10CP221127
Discount Schedule	OCP2
GTIN	3606480276804
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.90 in (7.36 cm)
Package 1 Width	1.49 in (3.78 cm)
Package 1 Length	1.36 in (3.45 cm)
Package 1 Weight	3.0 oz (84 g)

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile



[End of Life Information](#)

California Proposition 65

"WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov"

Connections and Schema

Connections and Wiring Diagrams

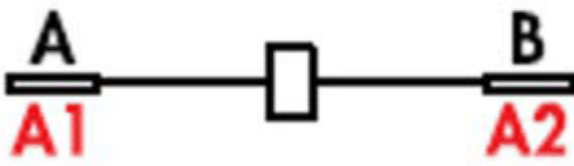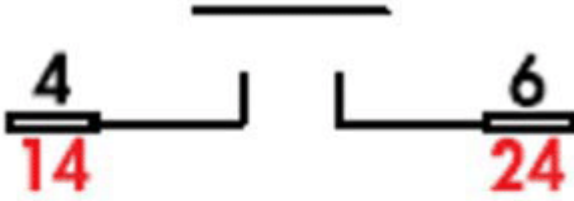

SPST-NO-(DM)

Connections and Wiring Diagrams

