

Product data sheet

Characteristics

XZCRA151164D2

Jumper cable XZ, male straight M12 5 pin, female straight M12 5 pin, PVC 2 m

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 97.50 USD



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

Complementary

Jumper cable end 1	M12 male 5 pins straight screw-on and clip-on
Jumper cable end 2	M12 female 5 pins straight screw-on and clip-on
Collar material	Metal
Cable composition	5 x 0.34 mm ²
Cable length	6.56 Ft (2 m)
Cable outer diameter	0.22 In (5.7 mm)
[Ue] rated operational voltage	250 V AC 300 V DC
Line Rated Current	4 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 MOhm
Net weight	0.26 Lb(US) (0.12 kg)

Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-13...185 °F (-25...85 °C) static

Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	03389119021715
Nbr. of units in pkg.	1
Package weight(Lbs)	9.42 Oz (267 g)
Returnability	No
Country of origin	PL

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.18 In (3 cm)
Package 1 width	5.51 In (14 cm)
Package 1 Length	5.91 In (15 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

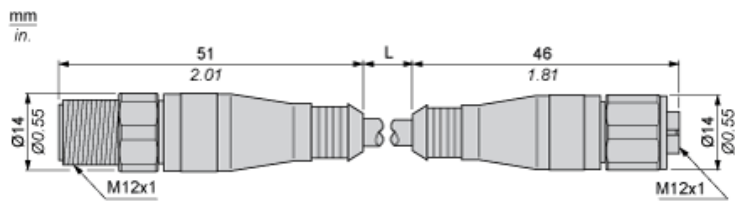

L : Length of cable

Connections and Schemes

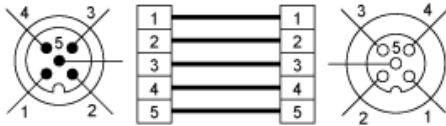

Product Life Status : **Commercialised**