


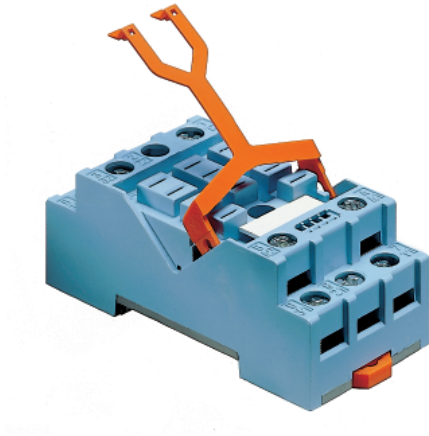

S5-S

Three pole, two level, logic wiring
Integrated clip and marking label


16 A 400 V

**Socket for MRC, 11-Pin Plug-In Relay Types
C5-A20, C5-A30, C5-G30, C5-X10, C5-M10,
C5-M20, C5-R20**



- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

Wiring Diagram

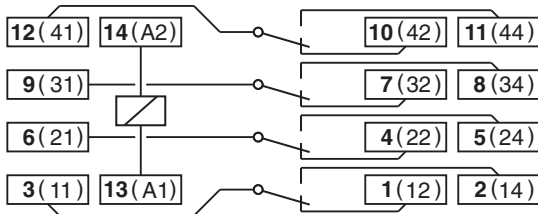

Dimensions - mm

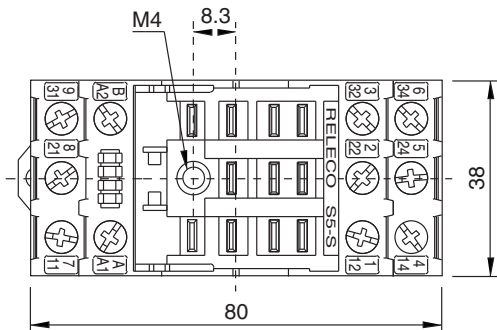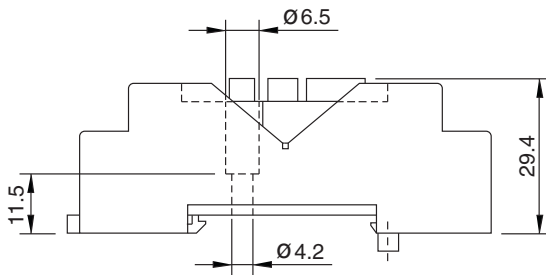

Specifications

Nominal Load:

16 A/400 V

Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	4 KV
Between all terminals and rail DIN	4 KV
Between adjacent poles	4 KV

Wire In-Lets Capacity:

Solid wire	4 mm ² or 2 x 2.25 mm ²
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm ²
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	

