










4, 5, 6, 8 10 and 12-Wire *euromast*® Receptacles, Front Mount, 1/2-14 NPT Threads

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Receptacles


Drawing Number	Part Number	Lead Specs.	Application	Pinout
 FK .. /14.5/NPT	FK 4.4-*/14.5/NPT	UL, CSA 4x22 AWG 105°C 300 V, 4 A	<i>Mates with 4-pin Cordsets</i>	1. BN 2. WH 3. BU 4. BK 
	FK 4.5-*/14.5/NPT	UL, CSA 5x22 AWG 105°C 250 V, 4 A	<i>Mates with 5-pin Cordsets</i>	1. BN 2. WH 3. BU 4. BK 5. GY 
	FK 6-*/14.5/NPT	UL, CSA 6x24 AWG 105°C 250 V, 4 A	<i>Mates with 6-pin Cordsets</i>	1. BN 2. WH 3. BU 4. BK 5. GY 6. PK 
	FK 8-*/14.5/NPT	UL, CSA 8x24 AWG 105°C 250 V, 4 A	<i>Mates with 8-pin Cordsets</i>	1. WH 5. GY 2. BN 6. PK 3. GN 7. BU 4. YE 8. RD 
	FK 8.6-*/14.5/NPT	UL, CSA 6x24 AWG 105°C 60 VAC/75 VDC, 2 A	<i>Mates with 8-pin Cordsets</i>	1. WH 5. GN 2. GN 6. N/C 3. YE 7. BU 4. GY 8. N/C 
	FK 10-*/14.5/NPT	UL, CSA 10x24 AWG 105°C 60 VAC/75 VDC 2 A	<i>Mates with 10-pin Cordsets</i>	1. WH 6. PK 2. BN 7. BU 3. GN 8. RD 4. YE 9. OG 5. GY 10. TN 
	FK 12-*/14.5/NPT	UL, CSA 12x24 AWG 105°C 60 VAC/75 VDC 2 A	<i>Mates with 12-pin Cordsets</i>	1. WH 7. BU 2. BN 8. RD 3. GN 9. OG 4. YE 10. TN 5. GY 11. BK 6. PK 12. VT 

See page B109 for dimensional drawings.

* Length in meters. Standard lead length is 0.5 Meters. Consult factory for other lengths.
Standard housing material is nickel plated brass "FK.."; "FKV.." indicates 316 stainless steel.
To specify PVC jacketed cable, add "/S717" to the end of the part number.

eurofast® Receptacles


1

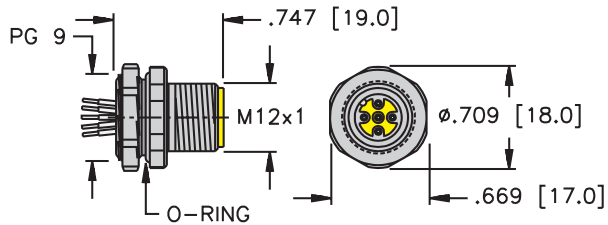

FS ..*

Pages B117 - B118


2

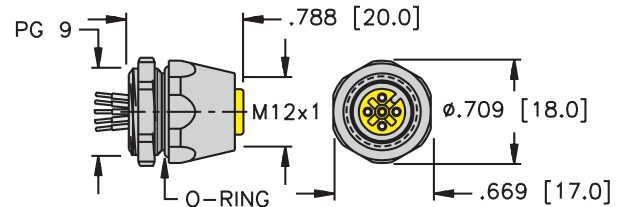

FK ..*

Pages B119 - B120


3

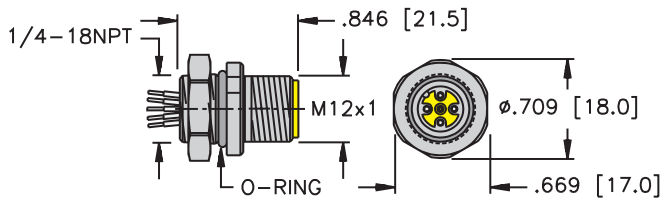

FS ..18.25

Pages B121 - B122


4

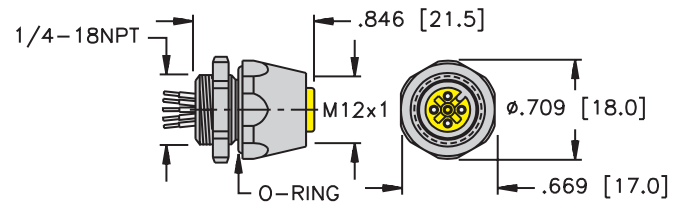

FK ..*/18.25

Pages B123 - B124


5

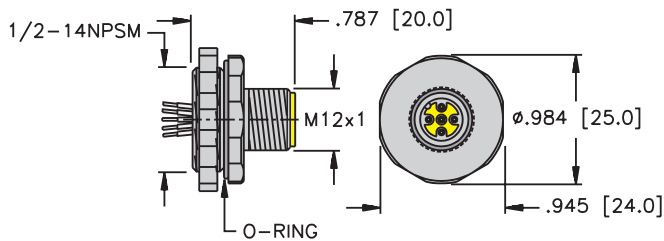

FS .. 14.5

Pages B125 - B126 & B151


6

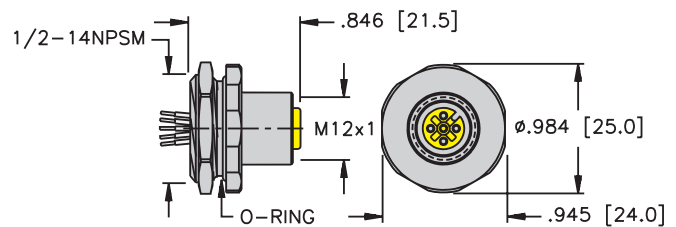

FK ..14.5

Page B127


7

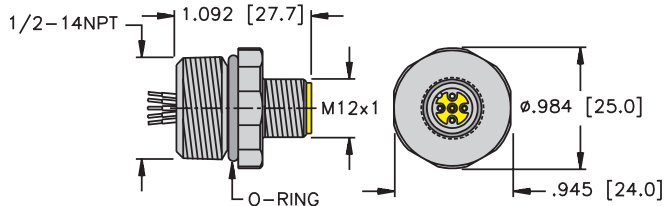

FS ..14.5/NPT

Pages B128 - B129

8

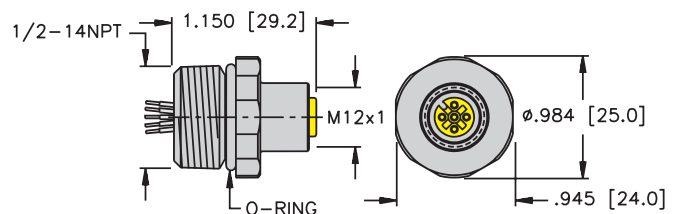

FK .. 14.5/NPT

Page B130