


NI6U-EH6.5-AP6X-V1131

Inductive Sensor – With Extended Switching Distance

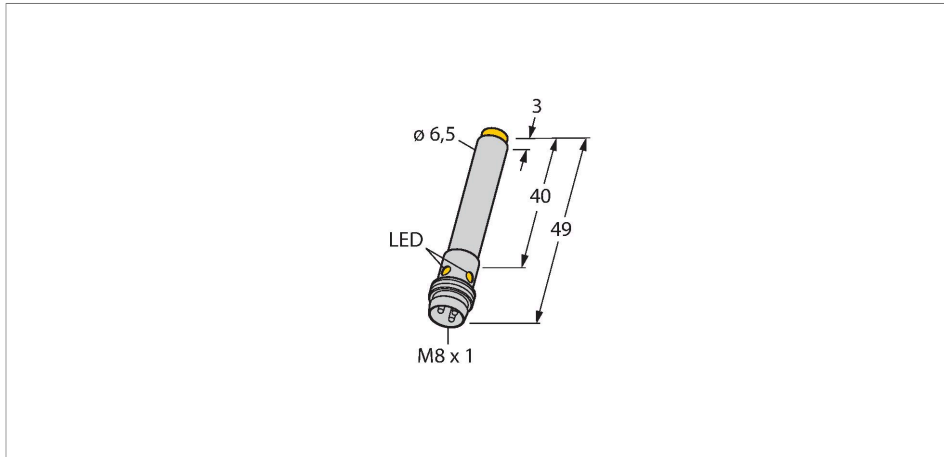



Features

- Smooth barrel, Ø 6.5 mm
- Stainless steel, 1.4427 SO
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Large switching distance
- High switching frequency
- Integrated protection against predamping
- Little metal-free spaces
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M8 x 1 male connector

Technical data

Type	NI6U-EH6.5-AP6X-V1131
ID	4631510
General data	
Rated switching distance	6 mm
Mounting conditions	Non-flush
Secured operating distance	$\leq (0.81 \times S_n)$ mm
Repeat accuracy	$\leq 2\%$ of full scale
Temperature drift	$\leq \pm 10\%$
Hysteresis	3...15 %
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	$\leq 10\% U_{ss}$
DC rated operational current	≤ 150 mA
No-load current	15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I_o	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	3-wire, NO contact, PNP
DC field stability	200 mT
AC field stability	200 mT _{SS}
Insulation class	□
Switching frequency	1 kHz

Wiring diagram

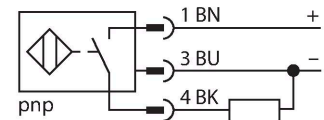

Functional principle

Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox+ sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization.

Technical data

Mechanical data	
Design	Smooth barrel, 6,5 mm
Dimensions	49 mm
Housing material	Stainless steel, 1.4427 SO
Active area material	Plastic, PA12-GF20
Electrical connection	Connector, M8 × 1
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Mounting instructions

Mounting instructions/Description															
	<table border="1"> <tbody> <tr> <td>Distance D</td> <td>26 mm</td> </tr> <tr> <td>Distance W</td> <td>18 mm</td> </tr> <tr> <td>Distance T</td> <td>26 mm</td> </tr> <tr> <td>Distance S</td> <td>10 mm</td> </tr> <tr> <td>Distance G</td> <td>36 mm</td> </tr> <tr> <td>Distance N</td> <td>12 mm</td> </tr> <tr> <td>Diameter active area B</td> <td>Ø 6.5 mm</td> </tr> </tbody> </table>	Distance D	26 mm	Distance W	18 mm	Distance T	26 mm	Distance S	10 mm	Distance G	36 mm	Distance N	12 mm	Diameter active area B	Ø 6.5 mm
	Distance D	26 mm													
Distance W	18 mm														
Distance T	26 mm														
Distance S	10 mm														
Distance G	36 mm														
Distance N	12 mm														
Diameter active area B	Ø 6.5 mm														
<p>All non-flush mountable cylindrical aprox+ sensors can be screwed to the upper edge of the barrel. Safe operation of the Ø 6.5 mm version is guaranteed with reduced switching distance of max. 30 %.</p>															

Wiring accessories

Dimension drawing	Type	ID	
	PKG3M-2/TEL	6625385	Connection cable, M8 female connector, straight, 3-pin, stainless steel coupling nut, cable length: 2 m, jacket material: PVC, black; cULus approval