


# RED,PVC,4X16,ITC,E-STOP Instrumentation Tray Cable – Reelfast™ Bulk Cable



## Features

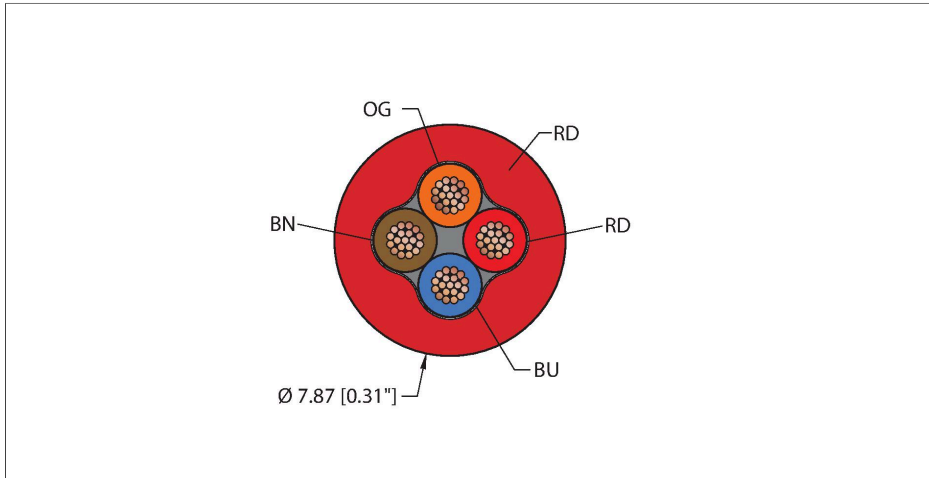

- ITC 150V
- PLTC 300V
- UL/CSA AWM 600V
- CMX OUTDOOR 300V
- CMG 300V
- Instrumentation Tray Cable
- Red PVC jacket, 4X16 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4

## Technical data

Type	RED,PVC,4X16,ITC,E-STOP
ID no.	RF50925
<b>Cable data</b>	
Cable Platform	Instrumentation Tray Cable
Total number of conductors	4
Cable diameter	Ø 7.87 mm
Cable jacket	PVC, Red
Conductor diameter	0.088 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	4 x 16 AWG [Similar to 1.50 mm <sup>2</sup> ]
Number of strands x O.D.	19 x 0.0117 "
Conductor colors	OG, RD, BU, BN
Weight	0.258 lbs. /meter
<b>Electrical properties at +20 °C</b>	
Voltage	ITC 150V PLTC 300V UL/CSA AWM 600V CMX OUTDOOR 300V CMG 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	4.4 Ω/1000ft max
<b>Mechanical and chemical properties</b>	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø

## Technical data

Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C
Ambient temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
<b>Approval</b>	
UL Approvals	UL 2250 ITC UL 13 PLTC Sunlight Resistant -40C Cold Bend Oil Res I Oil Res II UL 758 AWM 2586
CSA Approvals	CSA AWM I/II A/B UL 444 CMX OUTDOOR-CMG CSA FT4
Compliances	RoHS CE
<b>Note</b>	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.