


YEL,PVC,8X18,ITC,MSHA Instrumentation Tray Cable – Reelfast™ Bulk Cable



Features

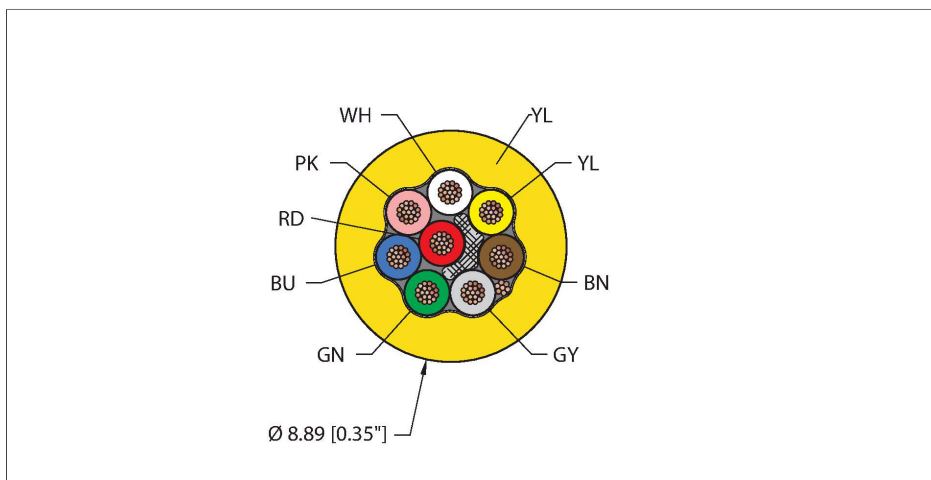

- ITC 150V
- PLTC 300V
- UL/CSA AWM 600V
- CMX OUTDOOR 300V
- CMG 300V
- Instrumentation Tray Cable
- Yellow PVC jacket, 8X18 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4

Technical data

Type	YEL,PVC,8X18,ITC,MSHA
ID no.	RF51087
Cable data	
Cable Platform	Instrumentation Tray Cable
Total number of conductors	8
Cable diameter	Ø 8.89 mm
Cable jacket	PVC, Yellow
Conductor diameter	0.076 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	8 x 18 AWG [Similar to 0.75 mm ²]
Number of strands x O.D.	19 x 0.0092 "
Conductor colors	RD, PK, WH, YL, BN, GY, GN, BU
Weight	0.283 lbs. /meter
Electrical properties at +20 °C	
Voltage	ITC 150V PLTC 300V UL/CSA AWM 600V CMX OUTDOOR 300V CMG 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	7.22 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø

Technical data

Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C
Ambient temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
Approval	
UL Approvals	UL 2250 ITC UL 13 PLTC Sunlight Resistant -40C Cold Bend Oil Res I Oil Res II UL 758 AWM 2586
CSA Approvals	CSA AWM I/II A/B UL 444 CMX OUTDOOR-CMG CSA FT4
Additional Approvals	MSHA
Compliances	RoHS
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.